



Daikin Altherma 3 Monobloc Heat Pump

4, 6, 8 Class

EB(D)LA


Daikin Altherma 3 Monobloc Heat Pump

This new addition to the Daikin Altherma 3 range offers lower capacity monobloc units, in 4, 6, and 8 class, all delivered in a market leading compact single fan casing

Ideal for well-insulated homes and renovation projects, it's the perfect choice for smaller modern dwellings that can be heated efficiently with low flow temperatures. It offers:

- › Specially developed compressor technology using R32 refrigerant
- › Available in heating only and reversible options
- › 60°C leaving water temperature
- › Heat pump operation down to -25°C
- › Bluevolution technology to achieve higher performance and lower global warming potential
- › Compact and stylish design
- › Cloud ready: WLAN cartridge standard in accessory bag
- › User interface included
- › PV / smart grid connection direct on the PCB
- › No separate wiring centre
- › Extremely quiet with sound power 52 dba
- › All main hydraulic components in outdoor unit including:
 - › Plate heat exchanger
 - › Pump
 - › Switch box including the PCB
 - › Stop valve
 - › Expansion vessel


R-32 BLUEVOLUTION

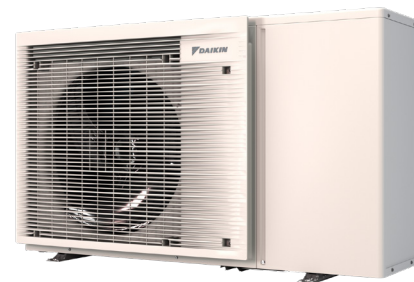

EB(D)LA4-8EV3



BRC1HHDW/S/K



up to

A+++

60°C



Daikin Altherma Monobloc

Outdoor Unit			Single Phase			Single Phase		
			EBLA04EV3	EBLA06EV3	EBLA08EV3	EDLA04EV3	EDLA06EV3	EDLA08EV3
Description			Class 4	Class 6	Class 8	Class 4	Class 6	Class 8
Function			Reversible	Reversible	Reversible	Heating Only	Heating Only	Heating Only
Dimensions ^[1]	Height x Width x Depth	mm	740 x 1260 x 347	740 x 1260 x 347	740 x 1260 x 347	740 x 1260 x 347	740 x 1260 x 347	740 x 1260 x 347
Nominal capacity	Heating (a)	kW	5.30	6.17	7.27	5.30	6.17	7.27
Seasonal space heating efficiency	Space heating (Average climate) 35°C	Class	A+++	A+++	A+++	A+++	A+++	A+++
	Space heating (Average climate) 55°C	Class	A++	A++	A++	A++	A++	A++
EER	Cooling		-	-	-	-	-	-
Operation range	Heating	°C	-25 ~ 35	-25 ~ 35	-25 ~ 35	-25 ~ 35	-25 ~ 35	-25 ~ 35
	Cooling	°C	-	-	-	-	-	-
	Hot water	°C	-25 ~ 35	-25 ~ 35	-25 ~ 35	-25 ~ 35	-25 ~ 35	-25 ~ 35
Sound power level	Heating	dBA	52	52	52	52	52	52
Refrigerant charge (factory)	R32	kg	1.5	1.5	1.5	1.5	1.5	1.5
Power supply			1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz	1-phase / 230V / 50Hz
Recommended fuses	Outdoor unit	A	25	25	25	25	25	25
Pump	No. of speeds		Inverter controller	Inverter controller	Inverter controller	Inverter controller	Inverter controller	Inverter controller
Expansion vessel volume		litres	8	8	8	8	8	8
Water connections (diameter)		inch	1" (male)	1" (male)	1" (male)	1" (male)	1" (male)	1" (male)
Minimum water volume		litres	20	20	20	20	20	20
Minimum flow rate	Cooling/Heating above 5°C	l/min	20	20	20	20	20	20
	Heating below -5°C	l/min	22	22	22	22	22	22
	Hot water	l/min	28	28	28	28	28	28
Maximum piping distance to tank		m	10	10	10	10	10	10
Maximum level difference		m	5	5	5	5	5	5

Heating a: Ambient air temperature -2C and leaving water temperature 45C (A-2/W45)

[1] Excludes aesthetic grill

NOTE: The data in the table is preliminary

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.

