



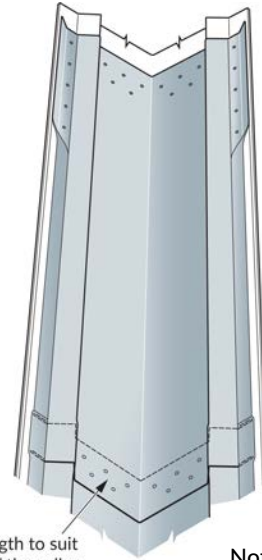

Pitched valleys

A. Details


Felt omitted for clarity

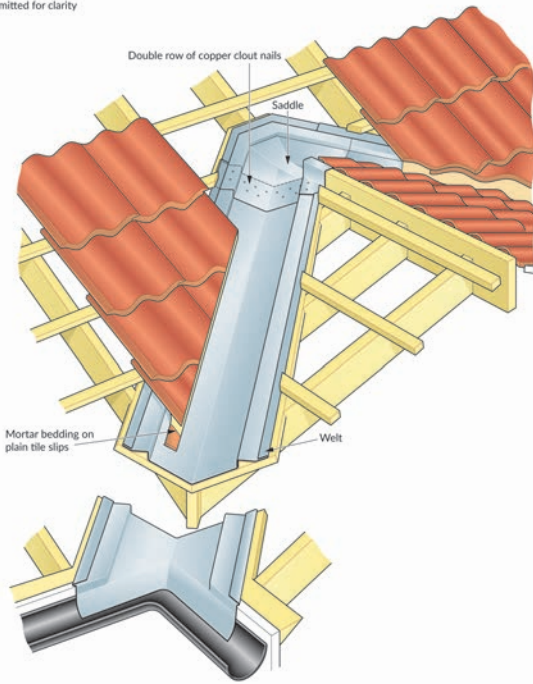

Additional head fixings for pitches above 60° - in top third of each side only.

Note: No flashing piece to exceed 1.5m in length.

B. Cross section

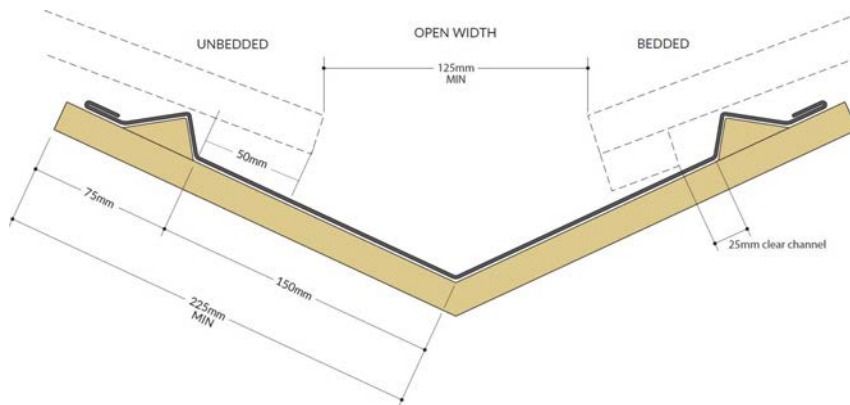

Open Width (mm)	With bedded tiles Width of Lead to line valley (mm approx)	With unbedded tiles or slates Width of Lead to line valley (mm approx)
100	500	400
125	525	425
150	550	450
200	600	500
250	650	550

For information on the sizes of pitched valleys in relation to catchment area, it is essential to refer to Rolled Lead Sheet Manual published by the LSTA.

