



LADDERS & ACCESS EQUIPMENT



THE WORLD LEADER IN LADDERS™

CONTENTS

ABOUT US	3
LADDER TRAINING CENTRES	5
HOW TO CHOOSE THE RIGHT LADDER	6
FIBREGLASS STEPLADDERS AND ACCESSORIES	
Benefits of Fibreglass	7
Fibreglass Podium Stepladder	8
Fibreglass Stepladder	9
Fibreglass Platform Stepladder	10
Lock-In Accessories	11
FIBREGLASS EXTENSION LADDERS	
Fibreglass Utility Extension Ladder - ALFLO	13
Fibreglass Trade Extension Ladder	14
ALUMINIUM STEPLADDERS	
MasterTrade™ Stepladder	15
MasterTrade™ Platform Ladder	16
Workstation Stepladder	17
High Handrail Stepladder	18
ALUMINIUM EXTENSION LADDERS AND ACCESSORIES	
D Rung Extension Ladder	19
Square Rung Extension Ladder	21
Extension Ladder Accessories	23
TELESCOPIC LADDERS	
Telescopic Soft Close Extension Ladder	24
Telescopic Extension Ladder	25

ALUMINIUM ROOF LADDERS

Double Section Sliding Roof Ladder.....	26
---	----

COMBINATION LADDERS

LEANSAFE X3 Fibreglass Ladder NEW	29
LEANSAFE X3 Aluminium Ladder NEW	30
ExtensionPLUS™ X4 Ladder.....	31
Multi-Purpose Telescopic Ladder.....	32
3 in 1 Combination Ladder.....	33
4 in 1 Combination Ladder.....	34
5 in 1 Combination Ladder.....	35
12 in 1 Multi-Purpose Ladder with Platform.....	36

WORK PLATFORMS

PRO Work Platform.....	38
Adjustable PRO Work Platform.....	39
Linking PRO Work Platform.....	40
Aluminium Work Platforms.....	41

RETAIL/WAREHOUSE ACCESS SOLUTIONS

MasterTrade™ Shop Step.....	42
-----------------------------	----

STEPSTOOLS

Handy Stepstool.....	43
----------------------	----

ACCESS TOWERS

Aluminium Mobile Access Tower.....	44
------------------------------------	----

LOFT LADDERS

Hideaway® Timber Loft Access Kit.....	45
Timber Complete Loft Access Kit.....	46
3 Section Easy Stow Loft Ladder.....	47
2 and 3 Section Loft Ladders.....	48

LEADING THE WAY IN

BEST IN CLASS

The Werner brand has earned its best in class reputation on some of the world's most demanding building sites. Our brand history reaches back over decades.

From large scale construction to professional painting and decorating, our products are used by workers who know what they're doing; it's about trust and confidence when working at height.



BROADEST RANGE

Werner is revered for its broad product line of professional products built to last for generations whilst being used in the most challenging conditions.

Our commitment to safety, productivity and quality is recognised throughout the industry.



LEADING THE WAY

Never satisfied with resting on past successes, WernerCo leads the way by continuing to invest in new products, markets, categories and technologies.

WernerCo takes great pride in developing new products designed for specific working at height situations, and this catalogue features numerous exciting new and innovative products all of which demonstrate the quality of design and build synonymous with the Werner brand.



ACCESS SOLUTIONS

OUTSTANDING DURABILITY

The Werner brand has a global reputation for designing and building products which offer outstanding durability and safety.

To further demonstrate our confidence in our products, WernerCo provides industry-leading guarantees against defects in materials and workmanship*.

100 YEARS OF INNOVATION

For a century, the Werner brand has stood for the development of new products that help professionals work faster and safer. Whatever jobs you are working on, Werner helps you reach new heights.



WHERE TO BUY

Available from leading merchants and stockists throughout the UK. Find a stockist at www.werner.co.uk. Backed by our next day delivery service providing direct to home or site delivery.

NEXT DAY DELIVERY ON ORDERS PLACED BEFORE 12 NOON.



Next day delivery is via a courier service for which there is a charge. Order by 12 noon for a guaranteed overnight delivery to UK mainland only. Subject to stock availability, excludes weekends and bank holidays.

*GUARANTEE

Werner 10 year guarantee applies across Werner Professional EN131 ladders, roof ladders, retail and warehouse steps.

5 year guarantee applies across Werner EN14975 loft ladders, work platforms, stepstools and telescopic ladders.

Access towers and accessories come with a 1 year guarantee.

Our guarantee includes faults arising from defects in workmanship or materials except for:

- Ordinary wear and tear of the product.
- Damage caused by misuse or abuse of the product.
- Damage caused by failure to comply with all written warnings and instructions for the product.
- Damage caused by an attempted repair of the product.

Material - means a material or component used by Werner in the manufacture of the product.

Workmanship - means the handling, assembly and manufacturing processes performed by or on behalf of Werner in order to manufacture the product.

LADDER TRAINING CENTRES

LADDER TRAINING

Our Training Centres are Ladder Association approved and deliver accredited training on the safe use of ladders and stepladders.

Ladder training plays a vital role in promoting safe working practices, reducing falls from height and is a key component in compliance with the Work at Height Regulations 2005 (WAHR).

Employers have a duty to ensure that employees involved in work at height are competent.

COMPETENCE:

technical knowledge + training + experience

COURSES AVAILABLE

- Ladders and Stepladders for Users
- Ladders and Stepladders Inspection
- Combined User and Inspection
- Steps and Step Stools for Users

Upon successful completion, every delegate receives a Ladder Association photo card and certificate as proof of competence.

Our Ladder Association registered training centres:

- Burton upon Trent, Staffordshire
- Milton Keynes, Buckinghamshire
- Maldon, Essex

For more information or to book a course please contact:

📞 01621 745 900

✉️ uk.customercare@wernerco.com




HOW TO CHOOSE THE RIGHT LADDER



Always select the correct ladder for the job. Check the type of product, the working height required and the maximum safe working load.

Always select a ladder that meets the required standards. Always follow the manufacturer's safety and operating instructions.



Ladder Category	Classification	Maximum Load
Stepladders	EN131 Professional	150kg
Combination Ladders	EN131 Non-Professional	150kg
Extension Ladders	ANSI	136kg
Stepstools	EN14183	150kg
Loft Ladders	EN14975	150kg

SAFETY STANDARDS EXPLAINED

The ladder standards in the UK have changed to a single British and European product standard covering all types of portable ladders. Our Werner ladders have changed to the latest EN131 standard, where applicable, with ladders having a load capacity of 150kg. There is one standard with two classifications:

EN131 Professional



EN131 Non-Professional



Ladders are independently tested and certified for compliance and labelled with the latest EN131 standard. Safety bodies such as Trading Standards and the Health and Safety Executive (HSE) expect manufacturers to comply and recommend that as users replace their ladders, these should comply with the latest standard.

There are separate requirements for stepstools (EN14183), loft ladders (EN14975), telescopic ladders (EN131-6) and single or multiple joint ladders (EN131-4).

Always take care to choose the correct standard of ladder for the job in hand. Professional users should always use ladders that have been tested for professional use.

Remember, our customer services department is available during office hours to help with your queries, please call on 01621 745 900.

FIBREGLASS LADDERS

Fibreglass - also called reinforced polymer (GRP) is a material universally recognised for being lightweight, extremely strong and robust and, of course, non-conductive to electricity.

MAXIMUM STRENGTH



Inherently strong and robust; ladders made from fibreglass offer high resistance to denting and twisting. Consistent quality and low maintenance are characteristics of fibreglass. These automatically lead to cost savings over time. Competitive whole-of-life costs are a recognised benefit of fibreglass ladders.

MAXIMUM DURABILITY



Extremely resistant to weathering, fibreglass does not absorb moisture or significantly weaken in the sun and does not corrode or rust.

Non-marking, fibreglass is warmer to the touch and retains its smooth surface. Fibreglass ladders are therefore ideal for specialist trades such as painting and decorating.

MAXIMUM SAFETY



Fibreglass does not conduct electricity, so it's safer to use around power lines or other live sources of electricity.

Electricians and other professionals working around electricity should choose fibreglass ladders.

FIBREGLASS - BEST OVERALL MATERIAL CHOICE

FIBREGLASS STEPLADDERS

136KG MAX. LOAD
(Load includes user, tools, materials, etc.)




720SERIES

Fibreglass Podium Stepladder



COMPATIBLE
SEE PAGES 11-12

- ① Waist high guard rail
- ② Fully compatible with unique Werner Lock-In Accessory System to customise the ladder top (see page 11-12)
- ③ Seven-Layer fibreglass construction
- ④ Podium with toe guard
- ⑤ Full aluminium bracing
- ⑥ Full set of rear horizontals



Waist-high guard rail securely wraps around work zone and holds tools



Extra-large platform feels like you're standing on the ground



Integrated rail shield, EDGE 360™ bracing, oversized foot pad

SPECIFICATIONS

Style	Product Code	No. of Treads	Platform Height	Safe Working Height*	Weight
Podium	72003	3	0.88m (2'11")	2.63m (8'8")	10.2kg
	72004	4	1.17m (3'10")	2.92m (9'7")	11.9kg
	72006	6	1.76m (5'9")	3.51m (11'6")	15.4kg
	72008	8	2.33m (7'8")	4.08m (13'5")	21.0kg
	72010	10	2.92m (9'7")	4.67m (15'4")	26.0kg

*Based on 1.75m (5'9") as the average reach height of a person.

FIBREGLASS STEPLADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)


716SERIES Fibreglass Stepladder



EN131



COMPATIBLE
SEE PAGES 11-12

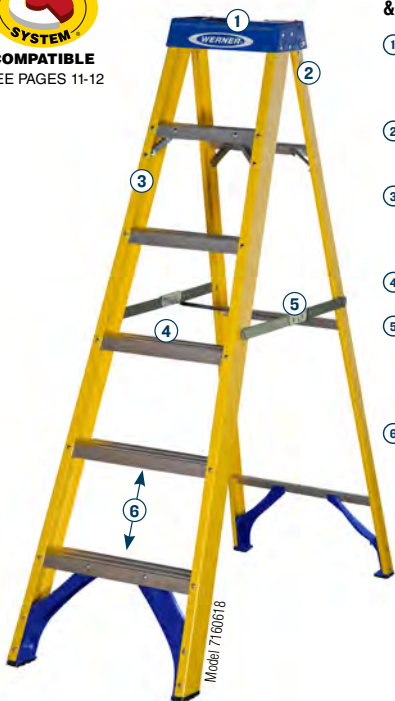

Suitable for Professional & Non-Professional use

- ① Holster Top with specially designed tool and equipment holders
- ② Semi-tubular rivets provide rigid fixings
- ③ Non-conductive fibreglass stiles, ideal for working around electricity
- ④ Slip-resistant treads
- ⑤ H-spreader enables single handed operation and add to the strength and stability of the ladder
- ⑥ Generous 298mm tread pitch gives excellent working heights



WATCH THE VIDEO



Fully compatible with unique Werner Lock-In Accessory System to customise the ladder top and safely secure your tools (see page 11-12)



EDGE moulded brace and foot pad combination provides enhanced bracing strength and protects the base tread from damage

SPECIFICATIONS

Style	Product Code	No. of Treads	Open Height	Safe Working Height*	Weight
Swingback	7160418	4	1.12m (38")	2.04m (6'8")	6.79kg
	7160518	5	1.40m (47")	2.32m (7'7")	7.70kg
	7160618	6	1.67m (56")	2.59m (8'6")	8.80kg
	7160818	8	2.23m (7'4")	3.15m (10'4")	11.60kg
	7161018	10	2.79m (92")	3.70m (12'2")	16.50kg
	7161218	12	3.34m (11')	4.26m (14')	19.60kg

*Based on 1.75m (5'9") as the average reach height of a person.

FIBREGLASS STEPLADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)



EN131

717SERIES

Fibreglass Platform Stepladder



COMPATIBLE
SEE PAGES 11-12




Suitable for Professional & Non-Professional use

- ① Steel platform for added strength - cycle tested to over 50,000 cycles using 150kg
- ② Heavy-duty slip-resistant tread profile for added strength and security
- ③ Holster Top with specially designed tool and equipment holders
- ④ Non-conductive fibreglass stiles, ideal for working around electricity
- ⑤ Semi-tubular rivets provide rigid fixings
- ⑥ Heavy-duty internal spreaders for ease of stowage



▶ WATCH THE VIDEO



Fully compatible with unique Werner Lock-In Accessory System to customise the ladder top and safely secure your tools (see page 11-12)

EDGE moulded brace and foot pad combination provides enhanced bracing strength and protects the base tread from damage

SPECIFICATIONS

Style	Product Code	No. of Treads	Platform Height	Safe Working Height*	Weight
Platform	7170218	2	0.47m (16")	2.22m (7'3")	6.43kg
	7170318	3	0.70m (23")	2.45m (8')	6.73kg
	7170418	4	0.93m (3')	2.68m (8'9")	9.15kg
	7170518	5	1.17m (3'10")	2.92m (9'7")	10.37kg
	7170618	6	1.40m (4'7")	3.15m (10'4")	11.75kg
	7170818	8	1.87m (6'1")	3.62m (11'10")	15.17kg
	7171018	10	2.33m (7'8")	4.08m (13'4")	18.13kg
	7171218	12	2.80m (9'2")	4.55m (14'11")	21.20kg

*Based on 1.75m (5'9") as the average reach height of a person.



LOCK-IN ACCESSORIES



Paint Cup & Paint Cup Liner



Job Bucket



Utility Bucket



Paint Cup



Job Bucket



Utility Bucket



Paint holder with integrated handle

- Built-in magnet to secure a paint brush
- Holds 1 litre of paint
- Can be used with disposable Paint Cup Liner

Model No.	Fits On
79001	716SERIES, 717SERIES, 720SERIES, 79004, 79005

Paint Cup Liner



Disposable Paint Cup Liner

- Makes cleaning up easy
- Pack of 4

Model No.	Fits On
79002	79001



Increase ladder storage and maximise your workspace

- Great for all trades: electrical, maintenance, plumbing, construction
- Integrated tape measure and screwdriver holders
- Metal carrying handle and integrated side handles
- Top grooves hold round pipes in place
- 11kg max. load capacity

Model No.	Fits On
79003	716SERIES 717SERIES 720SERIES



Expand your work surface

- Great for jobsite or household use
- Integrated Lock-In Socket for adding Paint Cup, ToolLasso or Utility Hook
- Ideal for wet or dry applications
- Holds up to 4.5 litres of liquid, 11kg max. load capacity

Model No.	Fits On
79004	716SERIES 717SERIES 720SERIES

CUSTOMISE YOUR LADDER TOP TAKE LESS TRIPS UP THE LADDER



Job**Caddy**



Utility**Hook**



Tool**Lasso**



Job Caddy



Utility Hook



ToolLasso



Great for holding small or odd shaped items

- 4 storage compartments keep small parts separate
- Screwdriver, pliers, putty knife, and cloth holders
- End hook built in for increased convenience
- Integrated Lock-In Socket for adding Paint Cup, ToolLasso or Utility Hook



Keep cords from getting tangled in your ladder

- Organise cords and keep them within reach
- Holds extension cords, air hoses, garden hoses, paint sprayers and other tools or project materials



Prevents tools from falling

- Wraps around the grip of power tools, hand tools, sealant guns
- Locks into HolsterTop to keep tools safe and ready to use
- Compatible with the ToolLasso belt clip
- Includes 1 belt clip and 2 Tool Lassos

Model No.	Fits On
79005	716SERIES 717SERIES 720SERIES

Model No.	Fits On
79006	716SERIES 717SERIES 720SERIES 79004, 79005

Model No.	Fits On
79007	716SERIES 717SERIES 720SERIES 79004, 79005

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)



774SERIES

Fibreglass Utility Extension Ladder - ALFLO



Exclusive Alflo rung joint means Twist-Proof performance



Suitable for heavy-duty industrial use

- ① Leather bow-rung to support ladder against pole
- ② ALFLO rung joints offer Twist-Proof performance
- ③ Non-conductive fibreglass stiles, ideal for working around electricity
- ④ Manual thumb operated locking catch to prevent sections separating
- ⑤ Rope Lash secures the ladder top to lighting columns, traffic lights and telegraph poles
- ⑥ Spring loaded semi-automatic rung locks for added security
- ⑦ Heavy-duty exterior rope pulley for easy and safe operation
- ⑧ Slip-resistant D rungs for comfort and security
- ⑨ Moulded foot brace provides enhanced bracing strength and increased protection against damage
- ⑩ Heavy-duty slip-resistant feet for added grip



Bow-rung and rope lash secure the ladder top to lighting columns, traffic lights and telegraph poles

SPECIFICATIONS

Product Code	Sections x Rungs	Closed Length	Open Length	Safe Working Height*	Weight
77425BR	2 x 8	2.45m (8')	3.90m (12'10")	4.48m (14'8")	15.9kg
77431BR	2 x 10	3.03m (9'11")	5.06m (16'7")	5.60m (18'4")	19.3kg
77435BR	2 x 12	3.61m (11'10")	6.22m (20'5")	6.72m (22'1")	22.5kg
77445BR	2 x 15	4.48m (14'8")	7.96m (27'7")	8.40m (27'7")	28.7kg
77450BR	2 x 16	4.77m (15'8")	8.54m (28'7")	8.96m (29'5")	30.7kg

*Based on 1.75m (5'9") as the average reach height of a person.

FIBREGLASS EXTENSION LADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

775SERIES

Fibreglass Trade Extension Ladder



EN131



Exclusive Alflo rung joint means Twist-Proof performance



Suitable for trade use

- 1 ALFLO rung joints offer Twist-Proof performance
- 2 Non-conductive fibreglass stiles, ideal for working around electricity
- 3 Slip-resistant D rungs for comfort and security
- 4 Manual thumb operated locking catch to prevent sections separating
- 5 Spring loaded semi-automatic rung locks for added security
- 6 Operating pulley with polypropylene rope for easy operation
- 7 Moulded foot brace provides enhanced bracing strength and increased protection against damage
- 8 Slip-resistant articulated feet for maximum ground contact



Dual action feet are for use on hard or penetrable surfaces and swivel easily

SPECIFICATIONS

Product Code	Sections x Rungs	Closed Length	Open Length	Safe Working Height*	Weight
77525	2 x 8	2.45m (8')	3.90m (12'10")	4.48m (14'8")	14.5kg
77531	2 x 10	3.03m (9'11")	5.06m (16'7")	5.60m (18'4")	17.2kg
77535	2 x 12	3.61m (11'10")	6.22m (20'5")	6.72m (22'1")	20.1kg
77539	2 x 13	3.90m (12'10")	6.80m (22'4")	7.28m (23'11")	24.7kg
77545	2 x 15	4.48m (14'8")	7.96m (26'1")	8.40m (27'7")	28.4kg

*Based on 1.75m (5'9") as the average reach height of a person.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

714SERIES MasterTrade™ Stepladder



EN131



Suitable for Professional & Non-Professional use

- ① Heavy gauge plastic edge caps for a smooth profile
- ② Strong, deep slip-resistant treads for comfort and security
- ③ Cross tubes on rear frames for increased rigidity
- ④ Heavy-duty internal spreaders for ease of stowage
- ⑤ Slip-resistant feet for maximum stability



▶ WATCH THE VIDEO



Engineered using high grade aluminium for toughest tasks on the job site

SPECIFICATIONS

Style	Product Code	No. of Treads	Open Height	Safe Working Height*	Weight
Swingback	7140418	4	0.85m (29")	1.97m (6'5")	3.88kg
	7140518	5	1.06m (35")	2.18m (7'1")	4.64kg
	7140618	6	1.27m (42")	2.39m (7'10")	5.55kg
	7140818	8	1.69m (56")	2.81m (9'2")	7.29kg
	7141018	10	2.11m (6'11")	3.23m (10'7")	9.46kg
	7141218	12	2.53m (8'3")	3.65m (11'11")	11.70kg

*Based on 1.75m (5'9") as the average reach height of a person.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

715SERIES

MasterTrade™ Platform Ladder



EN131



Suitable for Professional & Non-Professional use

- ① Heavy gauge plastic edge caps for a smooth profile
- ② Extended support rail for greater user comfort and utility
- ③ Heavy-duty internal spreaders for ease of stowage
- ④ Strong, deep slip-resistant treads for comfort and security
- ⑤ Slip-resistant feet for maximum stability



▶ WATCH THE VIDEO



Extra-large platform to provide secure and comfortable work area

SPECIFICATIONS

Style	Product Code	No. of Treads	Open Height	Safe Working Height*	Weight
Platform	7150418	4	0.85m (29")	2.60m (8'6")	6.65kg
	7150518	5	1.06m (35")	2.81m (9'2")	7.66kg
	7150618	6	1.27m (42")	3.02m (9'11")	8.60kg
	7150818	8	1.69m (5'6")	3.44m (11'3")	10.78kg
	7151018	10	2.11m (6'11")	3.86m (12'8")	12.98kg
	7151218	12	2.53m (8'3")	4.28m (14')	15.25kg

*Based on 1.75m (5'9") as the average reach height of a person.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

705SERIES

Workstation Stepladder



EN131



Suitable for Professional & Non-Professional use

- ① High support rail for added comfort and stability during use
- ② Stow away work tray keeps tools and materials accessible whilst you work
- ③ Twin safety handrails for increased support when climbing the ladder
- ④ Lower hinge provides a more compact footprint enabling users to get closer to their work
- ⑤ Steel platform for added strength - cycle tested to over 50,000 cycles using 150kg
- ⑥ Strong, slip-resistant, extra-deep treads for added grip
- ⑦ Slip-resistant feet for maximum stability



WATCH THE VIDEO



Integral tool tray holds load up to 12kg for taking fewer trips up the ladder

SPECIFICATIONS

Product Code	No. of Treads	Platform Height	Safe Working Height*	Weight
7050318	3	0.57m (1'10")	2.32m (7'7")	5.30kg
7050418	4	0.80m (2'7")	2.55m (8'4")	6.10kg
7050518	5	1.02m (3'4")	2.77m (9'1")	7.00kg
7050618	6	1.24m (4'1")	2.99m (9'10")	9.40kg
7050718	7	1.47m (4'10")	3.22m (10'7")	11.00kg

*Based on 1.75m (5'9") as the average reach height of a person.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

740SERIES

High Handrail Stepladder



EN131



Suitable for Professional & Non-Professional use

- ① High safety handrail for added stability
- ② Steel platform for added strength - cycle tested to over 50,000 cycles using 150kg
- ③ Secure slip-resistant treads for added grip
- ④ Slip-resistant feet for added grip



▶ WATCH THE VIDEO



Large slip-resistant platform provides a secure and comfortable work area

SPECIFICATIONS

Product Code	No. of Treads	Platform Height	Safe Working Height*	Weight
7400218	2	0.38m (1'3")	2.13m (6'11")	3.00kg
7400318	3	0.60m (1'11")	2.35m (7'8")	3.55kg
7400418	4	0.83m (2'8")	2.58m (8'5")	4.12kg
7400518	5	1.05m (3'5")	2.80m (9'2")	4.81kg
7400618	6	1.27m (4'2")	3.02m (9'10")	7.16kg
7400718	7	1.49m (4'10")	3.24m (10'7")	8.38kg
7400818	8	1.71m (5'7")	3.46m (11'4")	9.68kg

*Based on 1.75m (5'9") as the average reach height of a person.


150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

722SERIES

D Rung Extension Ladder - Double



EN131

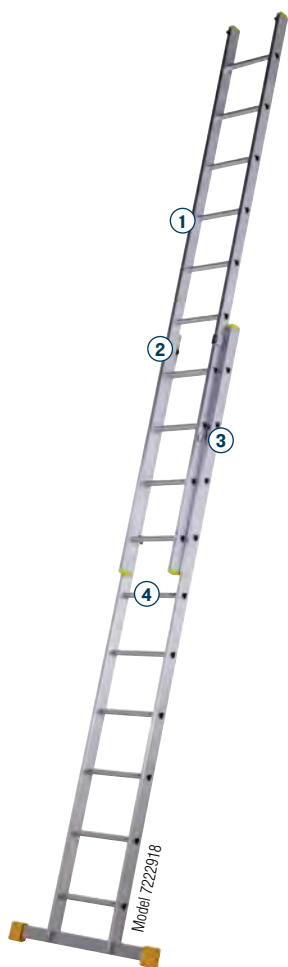

Suitable for Professional & Non-Professional use

- ① Robust box section stiles for strength and rigidity
- ② Nylon wheels for smooth ladder extension
- ③ Thumb operated locking catches to prevent the sections separating, both in use and when being stored
- ④ Slip-resistant D rungs for comfort and security



Heavy-duty wide stabiliser with slip-resistant feet for added safety

SPECIFICATIONS

Product Code	Sections x Rungs	Closed Length	Open Length	Safe Working Height*	Weight
7221818**	2 x 6	1.85m (6')	2.95m (9'8")	3.60m (11'9")	6.80kg
7222418	2 x 8	2.42m (7'11")	4.08m (13'4")	4.69m (15'4")	9.66kg
7222918	2 x 10	2.98m (9'9")	4.92m (16'1")	5.50m (18')	11.96kg
7223518	2 x 12	3.54m (11'7")	6.04m (19'9")	6.58m (21'7")	15.34kg
7224118	2 x 14	4.10m (13'5")	7.16m (23'5")	7.66m (25'1")	17.65kg
7224418	2 x 15	4.38m (14'4")	7.73m (25'4")	8.20m (26'10")	21.35kg
7224918	2 x 17	4.94m (16'2")	8.84m (29')	9.29m (30'5")	23.55kg

*Based on 1.75m (5'9") as the average reach height of a person.

**Stabiliser bar is not required or supplied with this model.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

723SERIES

D Rung Extension Ladder - Triple



EN131



Suitable for Professional & Non-Professional use

- ① Robust box section stiles for strength and rigidity
- ② Nylon wheels for smooth ladder extension
- ③ Thumb operated locking catches to prevent the sections separating, both in use and when being stored
- ④ Slip-resistant D rungs for comfort and security



Heavy-duty wide stabiliser with slip-resistant feet for added safety

SPECIFICATIONS

Product Code	Sections x Rungs	Closed Length	Open Length	Safe Working Height*	Weight
7231818	3 x 6	1.86m (6'1")	4.04m (13'3")	4.68m (15'4")	11.86kg
7232418	3 x 8	2.42m (7'11")	5.18m (17')	5.77m (18'11")	15.46kg
7232918	3 x 10	2.98m (9'9")	6.86m (22'6")	7.39m (24'3")	20.37kg
7233518	3 x 12	3.54m (11'7")	8.54m (28')	9.01m (29'6")	28.55kg
7234118	3 x 14	4.10m (13'5")	10.22m (33'6")	10.63m (34'10")	32.75kg

*Based on 1.75m (5'9") as the average reach height of a person.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

577SERIES

Square Rung Extension Ladder - Double




EN131



Suitable for Professional & Non-Professional use

- ① High performance robust box section stiles for durability
- ② Unique wrap-around top clips with smooth-glide runners to reduce wear and tear
- ③ Slip-resistant square rungs for comfort and security
- ④ Heavy-duty wide stabiliser with slip-resistant feet for added safety



High performance ladder level gauge for accurate positioning

SPECIFICATIONS

Product Code	Sections x Rungs	Closed Length	Open Length	Safe Working Height*	Weight
57711020**	2 x 6	1.83m (6')	2.95m (98")	3.66m (12')	6.69kg
57711120	2 x 8	2.40m (7'10")	4.08m (13'4")	4.75m (15'6")	10.12kg
57711220	2 x 10	3.01m (9'10")	4.97m (16'3")	5.56m (18'2")	12.34kg
57711320	2 x 12	3.57m (11'8")	6.09m (19'11")	6.64m (21'9")	14.81kg
57711420	2 x 14	4.13m (13'6")	7.21m (23'7")	7.72m (25'3")	18.15kg
57711520	2 x 16	4.70m (15'5")	8.33m (27'4")	8.80m (28'10")	25.72kg
57711620	2 x 18	5.21m (17'1")	9.12m (29'11")	9.61m (31'6")	28.35kg

*Based on 1.75m (5'9") as the average reach height of a person.

**Stabiliser bar is not required or supplied with this model.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

577SERIES

Square Rung Extension Ladder - Triple



EN131



Suitable for Professional & Non-Professional use

- ① High performance robust box section stiles for durability
- ② Unique wrap-around top clips with smooth-glide runners to reduce wear and tear
- ③ Slip-resistant square rungs for comfort and security
- ④ Heavy-duty wide stabiliser with slip-resistant feet for added safety



High performance ladder level gauge for accurate positioning

SPECIFICATIONS

Product Code	Sections x Rungs	Closed Length	Open Length	Safe Working Height*	Weight
57712020	3 x 6	1.89m (6'2")	4.13m (13'6")	4.76m (15'7")	12.39kg
57712120	3 x 8	2.45m (8')	5.81m (19')	6.38m (20'11")	15.42kg
57712220	3 x 10	3.01m (9'10")	6.93m (22'8")	7.46m (24'5")	22.92kg
57712320	3 x 12	3.58m (11'9")	8.61m (28'3")	9.09m (29'9")	28.91kg
57712420	3 x 14	4.14m (13'7")	9.73m (31'11")	10.17m (33'4")	33.05kg

*Based on 1.75m (5'9") as the average reach height of a person.

EXTENSION LADDER ACCESSORIES




ROOF RACK CLAMPS (79009)

The simple and effective way to secure ladders to your roof rack.




ROOF HOOK (45005)

Sturdy wheeled top helps move the ladder up the roof and into position. Fits to most single section ladders for quick and easy conversion to a safe roof ladder.

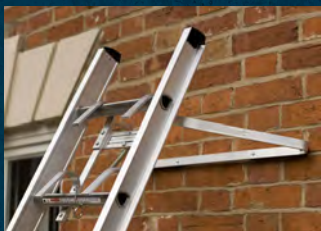


PRO STAND OFF (79008)

The Professional Stand Off positions the ladder away from the wall whilst you work, making access for guttering and window maintenance safe.

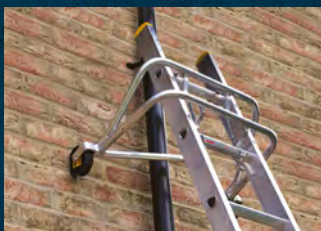

THE ULTIMATE STAND OFF (45044)

Allows unique roof access making it the ultimate heavy-duty Stand Off. Quick to fit to aluminium, fibreglass and timber ladders.

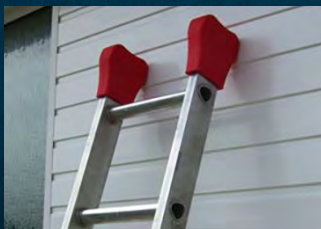

LADDER PADS (45025)

The essential work surface protection accessory for decorators, shop fitters, window installers, window cleaners and DIY users.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

850SERIES

Telescopic Soft Close Extension Ladder



EN131-6



Smaller folded size than standard extension ladders

Suitable for Professional & Non-Professional use

- ① Safety grip wall bumpers for firm grip and stability
- ② Soft close design for smooth retraction to prevent finger trapping
- ③ Lock indicators for increased safety
- ④ Automatic locking mechanism for added security when in use
- ⑤ Single handed unlocking system for easy closure
- ⑥ Rubber hand grip provides a secure grip when carrying the ladder
- ⑦ Moulded foot brace provides maximum strength to protect against damage
- ⑧ Non-marking feet protect floor from damage



Compact dimensions for easy transportation and storage

SPECIFICATIONS

Product Code	Number of Rungs	Closed Length	Extended Length	Safe Working Height*	Weight
85026	9	0.76m (2'6")	2.6m (8'6")	3.42m (11'2")	8.4kg
85029	10	0.79m (2'7")	2.9m (9'6")	3.71m (12'2")	9.4kg

*Based on 1.75m (5'9") as the average reach height of a person.


150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

870SERIES

Telescopic Extension Ladder



EN131-6

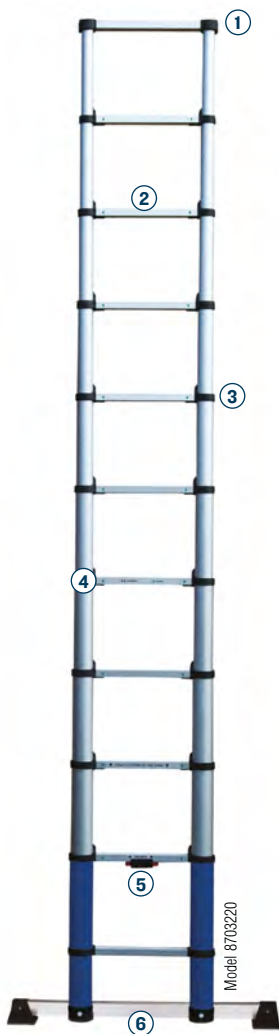

Suitable for Professional & Non-Professional use

Telescopic design for easy transportation and storage

- ① Safety grip wall bumpers for firmer grip and stability
- ② Slip-resistant rungs for comfort and security
- ③ Automatic locking mechanism for convenience and security
- ④ Lock indicators for increased safety
- ⑤ Single handed unlocking system for easy closure
- ⑥ Wide stabiliser with slip-resistant feet for added safety (8703220 only)



Extra rung spacing to prevent finger trapping

SPECIFICATIONS

Product Code	Number of Rungs	Closed Length	Extended Length	Safe Working Height*	Weight
8702920**	10	0.97m (3'2")	2.93m (9'7")	3.67m (12')	9.4kg
8703220	11	1.02m (3'4")	3.22m (10'6")	3.92m (12'10")	10.7kg

*Based on 1.75m (5'9") as the average reach height of a person.

**Stabiliser bar is not required or supplied with this model.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

771SERIES

Double Section Sliding Roof Ladder



Safety Tested



- ① Wheels for easy manoeuvring on roof
- ② Heavy-duty roof hook with large non-slip rubber end bar for superior apex fit
- ③ Strong box section stiles for strength and rigidity
- ④ Heavy-duty locking catches
- ⑤ Rubber sleeved non-slip support bars for roof protection



SPECIFICATIONS

Product Code	Total Number of Rungs	Closed Length	Overall Length	Weight
77101	8 + 10	3.21m (10'6")	4.89m (16'1")	13.05kg
77102	10 + 12	3.77m (12'4")	6.01m (19'9")	14.77kg
77103	12 + 14	4.33m (14'2")	7.13m (23'5")	16.80kg
77104	14 + 16	4.89m (16'1")	8.25m (27'1")	18.53kg

LEANSAFE X3

PROFESSIONAL 3 IN 1 MULTI-PURPOSE LADDER

THE ULTIMATE 3 IN 1 LADDER




LEAN

STEP

EXTEND

One-handed adjustment system
for quick and easy change to all
three modes



Available in
FIBREGLASS or ALUMINIUM

VERSATILE AND FUNCTIONALLY SUPERIOR



Unique top for corner, stud or pole leaning



Compact rear section fits between framing studs



Safety grip wall bumper for pole or corner leaning

COMBINATION LADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)



EN131

LEANSAFE X3


Fibreglass Multi-purpose Ladder



WATCH THE VIDEO

Robust, non-conductive, weather-resistant and non-marking fibreglass stiles

- ① Safety grip wall bumper provides firm grip
- ② Non-marring wall bumpers protect work surfaces from damage
- ③ Integral tool tray with magnetic tray securely holds tool and equipment
- ④ Unique top designed for any leaning mode
- ⑤ One-handed adjustment system
- ⑥ Locking latch to prevent the section separating when being stored
- ⑦ EDGE moulded brace and foot pad combination provides enhanced bracing strength and protects the base rung from damage

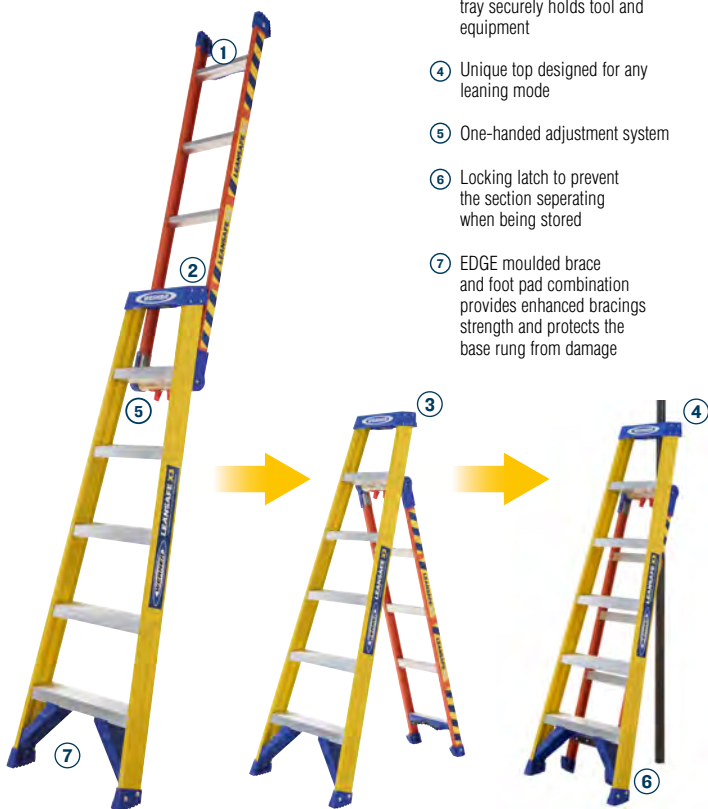

SPECIFICATIONS

Product Code	Closed Length	Mode	Open Length	Safe Working Height*	Weight
75071	1.80m (5'11")	Leaning Ladder	1.80m (5'11")	2.85m (9'4")	11.39kg
		Step ladder	1.80m (5'11")	3.13m (10'3")	
		Extension Ladder	2.90m (9'6")	3.70m (12'1")	

*Based on 2m as the average reach height of a person.

COMBINATION LADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)



EN131

LEANSAFE X3


Aluminium Multi-purpose Ladder



WATCH THE VIDEO

Made from high grade aluminium to ensure the ladder is lightweight but strong

- 1 Safety grip wall bumper provides firm grip
- 2 Non-marring wall bumpers protect work surfaces from damage
- 3 Integral tool tray with magnetic tray securely holds tool and equipment
- 4 Unique top designed for any leaning mode
- 5 One-handed adjustment system
- 6 Locking latch to prevent the section separating when being stored
- 7 Slip-resistant, reinforced rubber feet for added safety

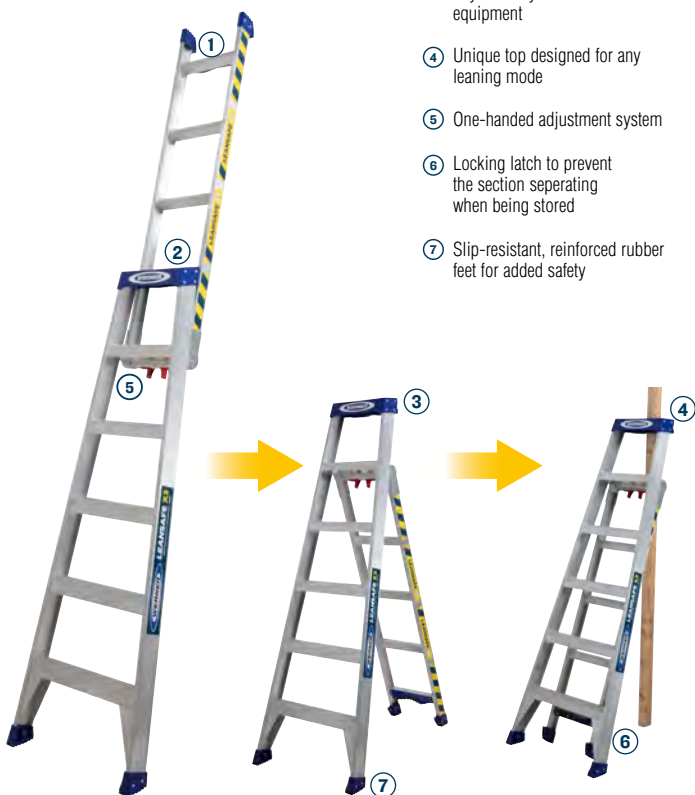

SPECIFICATIONS

Product Code	Closed Length	Mode	Open Length	Safe Working Height*	Weight
75070	1.80m (5'11")	Leaning Ladder	1.80m (5'11")	2.85m (9'4")	9.24kg
		Stepladder	1.80m (5'11")	3.13m (10'3")	
		Extension Ladder	2.90m (9'6")	3.70m (12'1")	

*Based on 2m as the average reach height of a person.

COMBINATION LADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

725SERIES

ExtensionPLUS™ X4 Ladder



EN131



Combines a large stepladder, extension ladder, stairwell ladder and freestanding extension ladder all in one product

- ① Robust box section stiles for strength and rigidity
- ② Slip-resistant D shaped rungs for comfort and security
- ③ Locking bar and opening restraint for increased safety
- ④ Thumb operated locking catch to prevent the section separating, both in use and when being stored
- ⑤ Heavy-duty wide stabiliser with slip-resistant feet for added safety

Suitable for Professional & Non-Professional use



SPECIFICATIONS

Product Code	Number of Rungs	Closed Length	Extension Ladder Mode		Weight
			Open Length	Safe Working Height*	
7251818	17	1.84m (6')	3.78m (12'5")	4.40m (14'5")	12.76kg
7252418	23	2.40m (7'10")	5.18m (17')	5.76m (18'10")	16.26kg
7252918	29	2.96m (9'8")	6.86m (22'6")	7.38m (24'2")	21.27kg
7253518	35	3.52m (11'6")	8.54m (28')	9.00m (29'6")	27.65kg
7254118	41	4.08m (13'4")	10.22m (33'6")	10.60m (34'9")	34.15kg

*Based on 1.75m (5'9") as the average reach height of a person.

COMBINATION LADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)



EN131/ANSI

MT-SERIES

Multi-Purpose Telescopic Ladder

Combines a stepladder, extension ladder, stairwell ladder and scaffold base all in one product

Compact folded dimensions, easy to use, transport and store

- ① Adjustable, telescopic sections with simple 'Click-Lock' hinge system
- ② Slip-resistant feet and splayed base for extra stability
- ③ Self-supporting scaffold base**



SPECIFICATIONS

Product Code	Sections x Rungs	Safety	Max. Load	Closed Length	Ext. Ladder Height	Safe Working Height* in Extension Ladder Mode	Weight
75053	4 x 3	Conforms to EN131	150kg	1.00m (3'3")	2.88m (9'5")	3.63m (11'11")	11.75kg
75054	4 x 4	Conforms to EN131	150kg	1.30m (4'3")	3.98m (13'1")	4.97m (16'4")	14.2kg
75055	4 x 5	ANSI Type 1A	136kg	1.75m (5'9")	5.79m (19')	6.71m (22')	19.8kg
75056	4 x 6	ANSI Type 1A	136kg	2.05m (6'9")	7.01m (23')	7.87m (25'10")	27.3kg

*Based on 1.75m (5'9") as the average reach height of a person.

**Plank and tie downs not included

COMBINATION LADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

7101318MODEL

3 in 1 Combination Ladder



EN131



Combines a stepladder, extension ladder and a stairwell ladder all in one product

- ① Slip-resistant square rungs for comfort and security
- ② Heavy-duty box section stiles for rigidity
- ③ Non-slip feet for added stability
- ④ Wide stabiliser for added safety
- ⑤ Locking restraint for added ladder stability when in use



Suitable for Professional & Non-Professional use

SPECIFICATIONS

Product Code	Closed Length	Mode	Open Length	Safe Working Height*	Weight
7101318	1.71m (5'7")	Extension Ladder	2.42m (7'11")	3.27m (10'8")	6.2kg
		Stepladder	1.64m (5'4")**	2.73m (8'11")	
		Stairwell Ladder	2.12m (6'11")**	3.02m (9'10")	

*Based on 1.75m (5'9") as the average reach height of a person.

**Open height (m).

COMBINATION LADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

7101418MODEL

4 in 1 Combination Ladder



EN131



Combines a stepladder, extension ladder, stairwell ladder and freestanding extension ladder all in one product

- ① Slip-resistant square rungs for comfort and security
- ② Heavy-duty box section stiles for regular use
- ③ Wide base stabiliser for increased safety
- ④ Sturdy locking bar for strength and security
- ⑤ Non-slip feet for added stability

Suitable for Professional & Non-Professional use

SPECIFICATIONS

Product Code	Closed Length	Mode	Open Length	Safe Working Height*	Weight
7101418	1.71m (5'7")	Extension Ladder	3.51m (11'6")	4.27m (14')	9.8kg
		Stepladder	1.62m (5'4")	2.68m (8'9")	
		Stairwell Ladder	2.42m (7'11")**	3.75m (12'4")	
		Freestanding Extension	2.42m (7'11")**	2.96m (9'8")	

*Based on 1.75m (5'9") as the average reach height of a person.

**Open height (m).

COMBINATION LADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

7101518MODEL

5 in 1 Combination Ladder



EN131



Combines a stepladder, extension ladder, stairwell ladder, level platform and stair platform all in one product

- ① Heavy-duty box section stiles for rigidity
- ② Self-locking catch prevents sections separating
- ③ Rigid construction with wide base stabiliser for increased safety
- ④ Non-slip feet for added stability
- ⑤ Slip-resistant platform provides a large and comfortable work area
- ⑥ Sturdy locking bar for extra strength and security

Suitable for Professional & Non-Professional use

SPECIFICATIONS

Product Code	Closed Length	Mode	Open Length	Safe Working Height*	Weight
7101518	1.71m (5'7")	Extension Ladder	2.48m (8'1")	3.37m (11')	16.8kg
		Stepladder	1.49m (4'11")**	2.57m (8'5")	
		Stairwell Ladder	2.05m (6'8")**	2.84m (9'3")	
		Level Platform	0.85m (2'9")***	2.60m (8'6")	
		Stair Platform	1.40m (4'7")***	3.15m (10'4")	

*Based on 1.75m (5'9") as the average reach height of a person.

**Open height (m).

***Platform height (m).

COMBINATION LADDERS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

75012MODEL

12 in 1 Multi-purpose Ladder with Platform




EN131-4

Multifunctional model with twelve positions including a stepladder, extension ladder, stairwell ladder, level platform, stair platform, plus more

Suitable for a wide variety of uses

- ① Removable, slip-resistant work platform
- ② Simple 'Click-lock' hinge system for easy conversion to all twelve modes
- ③ Stabiliser bar for extra safety
- ④ Compact folded dimensions for easy transportation and storage

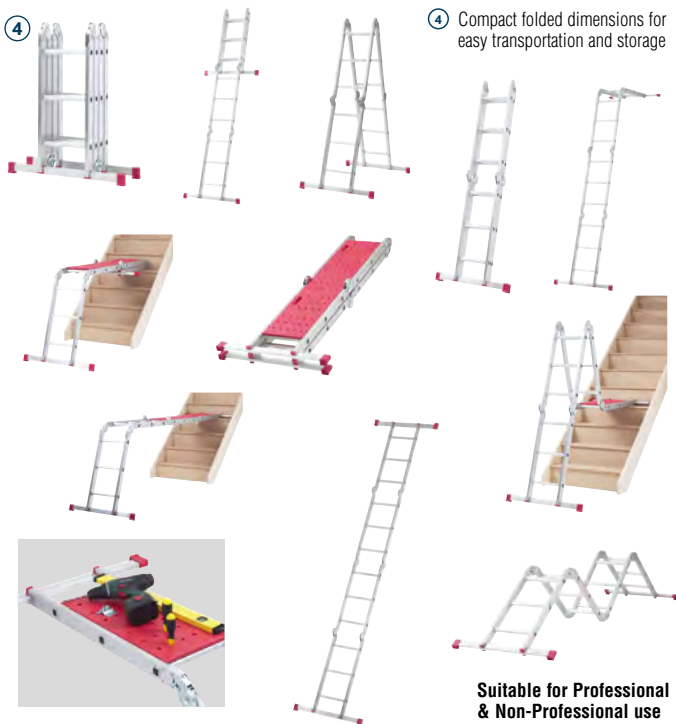

Suitable for Professional & Non-Professional use

SPECIFICATIONS

Product Code	Combination Heights			Safe Working Height* in Extension Ladder Mode	Weight
	Stepladder	Platform	Extension Ladder		
75012	1.65m (5'5")	0.90m (2'11")	3.38m** (11'1")	4.05m (13'3")	13.8kg

*Based on 1.75m (5'9") as the average reach height of a person.

**Open length (m).

ALUMINIUM WORK PLATFORMS



150KG MAX. LOAD
(Load includes user, tools, materials, etc.)



Safety Tested

79025MODEL

PRO Work Platform



▶ WATCH THE VIDEO

Folds completely flat for easy storage and transportation

- ① Dual self-locking legs securely lock when opened for safety and lock again when closed
- ② Large platform provides a non-slip work surface
- ③ Easy-Grab handle makes it simple to carry your platform quickly and safely
- ④ Sturdy slip-resistant steps for added comfort
- ⑤ Non-marking feet protects floor from damage



Easy-Grab handle allows you to transport the platform in one hand while holding supplies in the other



SPECIFICATIONS

Product Code	Platform Width	Platform Length	Platform Height	Safe Working Height*	Weight
79025	0.3m (1')	1.15m (3'9")	0.51m (1'8")	2.26m (7'5")	6.6kg

*Based on 1.75m (5'9") as the average reach height of a person.

ALUMINIUM WORK PLATFORMS

136KG MAX. LOAD
(Load includes user, tools, materials, etc.)

79023MODEL

Adjustable PRO Work Platform



Safety Tested



WATCH THE VIDEO



11cm



Folds completely flat for easy storage and transportation

Configures to ten different height positions, ideal for working on uneven surfaces and along stairways

- 1 Large platform provides a non-slip work surface
- 2 Easy-Grab handle makes it simple to carry your platform quickly and safely
- 3 Lightweight aluminium design
- 4 Slip-resistant bumpers for stairwell mode
- 5 Non-marring feet provide slip-resistance and protect floor from damage



Single handed lock and height adjustment for ease of use



Storage



Stairway



Uneven ground



Adjustable legs

SPECIFICATIONS

Product Code	Platform Width	Platform Length	Platform Heights	Safe Working Height*	Weight
79023	0.35m (1'1")	1.16m (3'10")	0.51 - 0.76m (1'8" - 2'6")	2.26 - 2.51m (7'5" - 8'3")	9.75kg

*Based on 1.75m (5'9") as the average reach height of a person.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

79035 MODEL

Linking PRO Work Platform



Safety Tested




WATCH THE VIDEO

Compact folded dimensions for easy transportation and storage

Heavy duty yet lightweight, easy to carry and set up

- ① Dual self-locking legs securely lock when opened for safety and lock again when closed
- ② Easy-Grab handle makes it simple to carry your platform quickly and safely
- ③ Large platform provides a non-slip work surface
- ④ Non-marring feet provide slip-resistance and protect floor from damage



Connect two linking platforms together for a continuous work surface

SPECIFICATIONS

Product Code	Platform Width	Platform Length	Platform Height	Safe Working Height*	Weight
79035	0.41m (1'4")	1.22m (4')	0.52m (18")	2.27m (7'5")	9.98kg

*Based on 1.75m (5'9") as the average reach height of a person.

ALUMINIUM WORK PLATFORMS

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

780SERIES

Aluminium Work Platforms



Safety Tested



Lightweight and compact folded dimensions for easy transportation and storage

- ① Square platform ideal for those needing a large space whilst working
- ② Simple and safe to use with locking hinges for added safety
- ③ Splayed legs for extra stability
- ④ Wide and deep non-slip platform



SPECIFICATIONS

Style	Product Code	Platform Width	Platform Length	Platform Height	Safe Working Height*	Weight
Square	78060	0.6m (2')	0.6m (2')	0.51m (1'8")	2.26m (7'5")	5.7kg
Compact	78069	0.3m (1')	0.69m (2'3")	0.5m (1'8")	2.25m (7'5")	3.9kg
Jumbo	78099	0.3m (1')	0.90m (2'11")	0.5m (1'8")	2.25m (7'5")	4.7kg

*Based on 1.75m (5'9") as the average reach height of a person.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

708SERIES MasterTrade™ Shop Step



EN131



Suitable for Professional & Non-Professional use

- ① Heavy gauge plastic edge caps for a smooth profile
- ② Extended support rail for greater user comfort and utility
- ③ Secure standing platform to provide secure and comfortable work area
- ④ Twin safety handrails for increased support and safety whilst climbing
- ⑤ Heavy-duty internal spreaders for ease of stowage
- ⑥ Strong, deep treads for comfort and security
- ⑦ Made from high grade aluminium, exceptionally robust yet lightweight to use
- ⑧ Large non-slip feet for maximum stability



Extra-large platform to provide secure and comfortable work area

SPECIFICATIONS

Product Code	No. of Treads	Platform Height	Safe Working Height*	Weight
7080518	5	1.06m (3'5")	2.81m (9'2")	9.01kg
7080618	6	1.27m (4'2")	3.02m (9'10")	9.83kg
7080818	8	1.69m (5'6")	3.44m (11'3")	12.07kg
7081018	10	2.11m (6'11")	3.86m (12'8")	14.68kg
7081218	12	2.53m (8'3")	4.28m (14')	16.90kg

*Based on 1.75m (5'9") as the average reach height of a person.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)



127SERIES

Handy Stepstool

Folds flat for easy storage

Can be used as a stool or steps

- ① Deep steps for maximum stability and comfort
- ② Slip-resistant feet for added stability



Slim design takes up minimal storage space

SPECIFICATIONS

Product Code	No. of Steps	Folded Dimensions	Top Step Height	Safe Working Height*	Weight
12782	2	0.89m x 0.45m x 0.04m (2'11" x 1'5" x 2")	0.45m (1'5")	2.20m (7'2")	4.1kg
12783	3	1.14m x 0.47m x 0.04m (3'9" x 1'6" x 2")	0.68m (2'3")	2.43m (8')	6.0kg

*Based on 1.75m (5'9") as the average reach height of a person.

140KG MAX. SAFE WORKING LOAD PER PLATFORM LEVEL
(Load includes user, tools, materials, etc.)



EN1004


303SERIES

Aluminium Mobile Access Tower

Compact, modular system - allows users to build up to 3 working heights

Double-braked wheels for easy manoeuvrability and additional safety

Portable and lightweight - fits in the back of a car or van

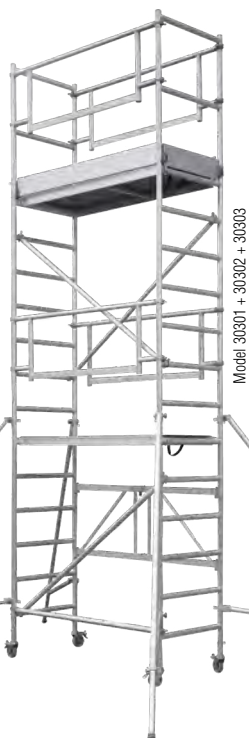

Compact Base Pack (30301) fits easily through doorways

SPECIFICATIONS

Product Code	Description	Consists of	Platform Height	Safe Working Height*	Pack Weight
30301	Mobile Access Tower Extension Pack 1	1 x Platform with Trapdoor 1 x Folding Frame 1 x Horizontal Brace 1 x Guardrail Frame 4 x Castors	0.7m	2.7m	28.3kg
30302	Mobile Access Tower Extension Pack 2	1 x Guardrail Frame 4 x Toe Board Holders 4 x Toe Boards 2 x Top Frames 4 x Stabilisers	1.8m	3.8m	25.9kg
30303	Mobile Access Tower Extension Pack 3	1 x Platform with Trapdoor 2 x Guardrail Frames 3 x Diagonal Braces 2 x 7 Rung Frames	3.8m	5.8m	32.1kg

*Maximum Working Height based on a 2.0m (6'7") height and reach of a person and whilst standing on the top platform of a Base Pack.

**Maximum Working Height based on a 2.0m (6'7") height and reach of a person and whilst standing on the top platform of a combined tower which includes the Base Pack and Extension Pack 2.

***Maximum Working Height based on a 2.0m (6'7") height and reach of a person and whilst standing on the top platform of a combined tower which includes the Base Pack, Extension Pack 2, and Extension Pack 3.

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

76105MODEL

Hideaway® Timber Loft Access Kit



EN14975



Supplied as a fully assembled unit

3 section folding loft ladder including 36mm insulated trapdoor with assisted stowage

Suitable for heights up to 2.85m (9'4")

- ① Includes handrail for added safety
- ② White trapdoor with plastic architraves and rubber draught excluder to prevent loss of heat and draughts
- ③ Anti-slip treads for comfortable climbing
- ④ Plastic slip-resistant feet for added grip
- ⑤ Requires no headroom or storage in the loft - ladder stores within trapdoor



WATCH THE VIDEO

SPECIFICATIONS

Product Code	Sections	Max. Floor to Ceiling Height	Min. Loft Opening Size (LxW)	Opening Arc	Weight
76105	3	2.85m (9'4")	1.13 x 0.54m (3'9" x 1'9")	1.62m (5'3")	25.8kg

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

76103MODEL

Timber Complete Loft Access Kit



EN14975




A complete loft access solution including ladder, loft surround, 26mm insulated trapdoor and spring assisted stowage

Supplied as a semi-assembled unit

Suitable for heights up to 2.8m (9'2")

- ① Wide and deep timber treads for comfort when climbing
- ② Slip-resistant feet for added grip
- ③ Uses no further loft floor space—ladder stores within trapdoor

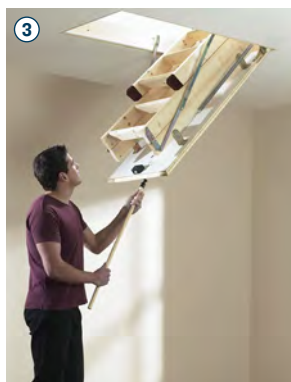

SPECIFICATIONS

Product Code	Sections	Max. Floor to Ceiling Height	Min. Loft Opening Size (LxW)	Opening Arc	Weight
76103	3	2.80m (9'2")	1.13m x 0.55m (3'9" x 1'10")	1.58m (5'2")	23kg

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

76013MODEL

3 Section Easy Stow Loft Ladder



EN14975




Comes complete with Universal stowing pole, compatible with most loft hatches

Suitable for heights up to 3m (9'10")

- ① Extended in-loft handrail for added safety when entering or leaving the loft
- ② Slip-resistant D rungs for comfort and security
- ③ Locking catches for added safety
- ④ Plastic slip-resistant feet for added grip
- ⑤ Spring assisted Easy Stow system gives total control when lowering or stowing the loft ladder



WATCH THE VIDEO



Includes step-by-step instruction guide and fittings

Floor Thickness	Minimum Loft Opening Length
7.6cm (3")	0.40m (1'4")
10.2cm (4")	0.41m (1'4")
12.7cm (5")	0.43m (1'5")
15.3cm (6")	0.44m (1'5")
17.8cm (7")	0.45m (1'6")
20.3cm (8")	0.46m (1'6")

SPECIFICATIONS

Product Code	Max. Floor to Loft Floor Height	Min. Floor to Loft Floor Height	Min. Loft Opening Width	Min Clearance Arc	Min. Storage Space	Weight
76013	3m (9'10")	2.13m (7')	0.38m (1'3")	0.71m (2'4")	1.12m (3'8")	6.7kg

150KG MAX. LOAD
(Load includes user, tools, materials, etc.)

76SERIES

2 and 3 Section Loft Ladders



Comes complete with Universal stowing pole, compatible with most loft hatches

Suitable for heights up to 3m (9'10")

- ① Includes handrail
- ② Slip-resistant D rungs for comfort and security
- ③ Slip-resistant feet for added grip



Includes step-by-step instruction guide and fittings

[▶ WATCH THE VIDEO](#)

Floor Thickness	Minimum Loft Opening Length	
	2 Section	3 Section
7.6cm (3")	0.49m (1'7")	0.40m (1'4")
10.2cm (4")	0.50m (1'8")	0.41m (1'4")
12.7cm (5")	0.51m (1'8")	0.43m (1'5")
15.3cm (6")	0.53m (1'9")	0.44m (1'5")
17.8cm (7")	0.54m (1'9")	0.45m (1'6")
20.3cm (8")	0.55m (1'9")	0.46m (1'6")



SPECIFICATIONS

Product Code	Sections	Max. Floor to Loft Floor Height	Min. Floor to Loft Floor Height	Min. Loft Opening Width	Min Clearance Arc	Min. Storage Space	Weight
76002	2	2.69m (8'10")	2.13m (7')	0.38m (1'3")	0.71m (2'4")	1.27m (4'2")	4.3kg
76003	3	3.00m (9'10")	2.13m (7')	0.38m (1'3")	0.71m (2'4")	1.12m (3'8")	5.1kg







wernerco.co.uk

Werner UK Sales and Distribution Limited
Blackwater Trading Estate,
The Causeway, Maldon,
Essex, CM9 4LJ.